
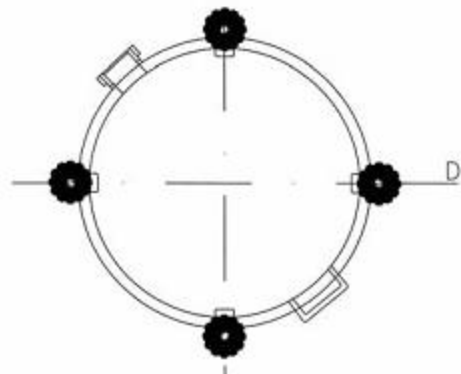


Chiusino superiore tipo "asettico" in acciaio inox AISI 304 o  
 AISI 316/L - luce utile di passaggio mm.  
 200 - 300 - 420 - 460 - 500 - 600 - 700 - 800  
 900 - 1000 - 1200 - 1400 - 1500 - 1600

Pressione massima di esercizio: 0,2 BAR

Working pressure: 0,2 BAR

H speciale su richiesta / Special H on request

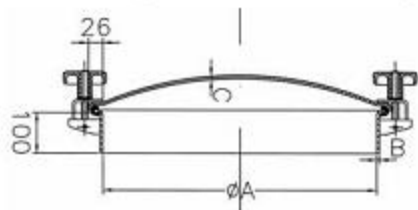

Art. D 20



Upper lid "aseptic" in AISI 304 or AISI 316/L stainless steel  
 access  $\varnothing$  200 - 300 - 420 - 460 - 500 -  
 600 - 700 - 800 - 900 - 1000 - 1200 - 1400 - 1500 - 1600 mm.

Domdeckel aus Edelstahl W Nr 1 4301 - 1 44Q1 für sterile Lagerungen - lichte Weite  
 200 - 300 - 420 - 460 - 500 - 600 - 700 - 800 - 900 - 1000 - 1200 - 1400 - 1500 - 1600 mm.

Trappe supérieur type "aseptique" en inox AISI 304 ou AISI 316/L - passage utile mm.  
 200 - 300 - 420 - 460 - 500 - 600 - 700 - 800 - 900 - 1000 - 1200 - 1400 - 1500 - 1600.

Domo superior tipo "aséptico" de acero inoxidable AISI 304 o AISI 316/L - luz útil de pasaje  
 200 - 300 - 420 - 460 - 500 - 600 - 700 - 800 - 900 - 1000 - 1200 - 1400 - 1500 - 1600 mm.

A	$\varnothing$ 200	$\varnothing$ 300	$\varnothing$ 420	$\varnothing$ 460	$\varnothing$ 500	$\varnothing$ 600	$\varnothing$ 700	$\varnothing$ 800	$\varnothing$ 900	$\varnothing$ 1000	$\varnothing$ 1200	$\varnothing$ 1400	$\varnothing$ 1500	$\varnothing$ 1600
B	2,5	2,5	2,5	2,5	2,5	2,5	3,0	3,0	3,0	3,0	3,0	3,0	3,0	3,0
C	2	2	2,5	2,5	2,5	2,5	3,0	3,0	3,0	3,0	3,0	3,0	3,0	3,0
D	3	4	4	4	4	5	6	8	8	10	10	12	14	16