



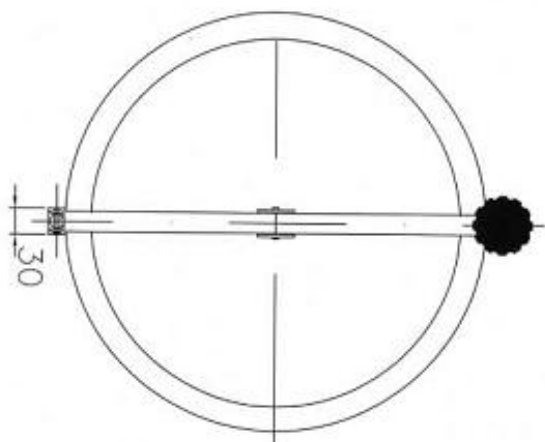

Chiusino superiore tipo "asettico" in acciaio AISI 304/L o  
AISI 316/L  
luce utile di passaggio mm. 200 - 300 - 420 - 460 - 500 - 600

Pressione massima di esercizio: 0,1 BAR  
Working pressure: 0,1 BAR

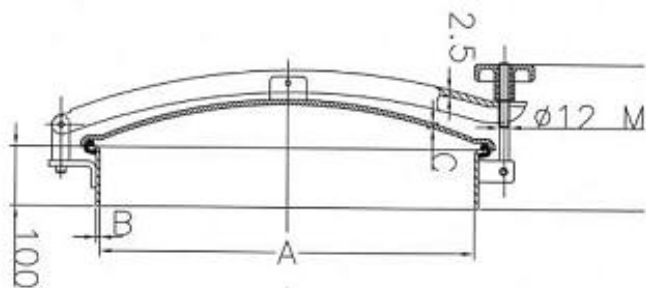

A	Ø 200	Ø 300	Ø 420	Ø 460	Ø 500	Ø 600
B	2,0	2,0	2,0	2,0	2,0	2,0
C	2,0	2,0	1,5	1,5	1,5	2,0



Upper lid "aseptic" in AISI 304/L or AISI 316/L stainless steel  
access 200 - 300 - 420 - 460 - 500 - 600 mm.

Domdeckel aus Edelstahl W.Nr. 1.4301 - 1.4401, für sterile Lagerungen  
lichte Weite 200 - 300 - 420 - 460 - 500 - 600 mm.

Trappe supérieur type "aseptique" en inox AISI 304/L ou AISI 316/L  
passage mm. 200 - 300 - 420 - 460 - 500 - 600

Domo superior tipo "aséptico" de acero inoxidable AISI 304/L o AISI 316/L  
luz útil de pasaje 200 - 300 - 420 - 460 - 500 - 600 mm.