

Art. D 8



Upper lid "aseptic" in AISI 304 or
AISI 316 stainless steel - access \varnothing 200 - 300 - 420 -
460 - 500 - 600mm.

Domdeckel aus Edelstahl W.Nr. 1.4301 - 1.4401 für sterile Lagerungen - lichte Weite
200 - 300 - 420 - 460 - 500 - 600 mm.



Trappe supérieur tipe "aseptique" en inox AISI 304 ou AISI 316 - passage utile mm.
200 - 300 - 420 - 460 - 500 - 600.

Domo superior tipo "aséptico" de acero inoxidable AISI 304 o AISI 316 - luz útil
de pasaje 200 - 300 - 420 - 460 - 500 - 600 mm.

Chiusino superiore tipo "asettico" in acciaio inox AISI 304 o
AISI 316 - luce utile di passaggio mm. 200 - 300 - 420 - 460
- 500 - 600.

Pressione massima di esercizio: 0,2 BAR
Working pressure: 0,2 BAR

H speciali su richiesta/special H on request

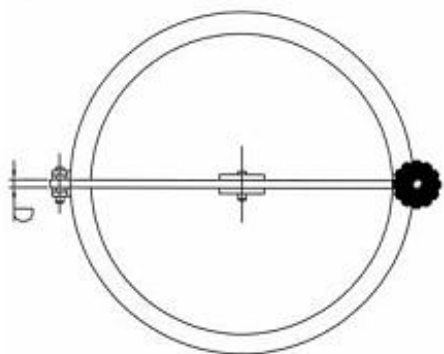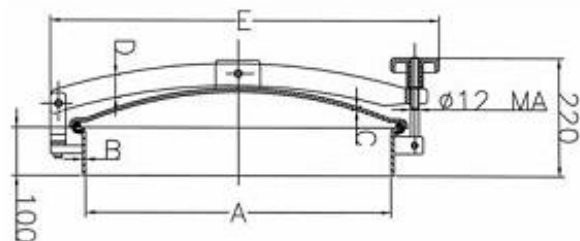

	\varnothing 200	\varnothing 300	\varnothing 420	\varnothing 460	\varnothing 500	\varnothing 600
A	320	425	560	605	640	740
B	2,5	2,5	2,5	2,5	2,5	2,5
C	2	2	2,5	2,5	2,5	2,5
D	30x8	35x8	40x10	40x10	40x10	40x10
E	320	425	560	605	640	740